



Producto distribuido por

**SDM**  
Oil & Gas

 (+51) 999 012777  [ventas@sdm.pe](mailto:ventas@sdm.pe)

[www.sdm.pe](http://www.sdm.pe) | Av. Galvez Barrenechea 274. San Isidro



# Vari+Plus® VP

*High Capacity Extended Surface Mini-Pleat Filters*



**Featuring:**

**Revolutionary,  
Exclusive, DURA-TUFF™  
Synthetic Media**

- **All Plastic Construction**
- **Highly Durable 100% Synthetic Media**
- **Fully Incinerable**
- **Moisture and Chemical Resistant**
- **Low Resistance**

# Vari+Plus<sup>®</sup> VP

High Capacity Extended Surface Mini-Pleat Filters

## Product Information and Specifications

**Two Efficiencies** - MERV 15, MERV 13

**All Plastic Construction** - No metal components, moisture, corrosion and chemical resistant, light weight




**Revolutionary Exclusive, Dura-Tuff<sup>™</sup> Synthetic Media** - Extremely durable, resists tearing and abrasion, damage resistant, high dust holding capacity

**Fully Incinerable** - Enhances disposal options, assists with implementation of ISO 14001 Environmental Management System

**Rigid Cell Design** - Ideal for variable air volume systems, high air flow, turbulent conditions, repeated fan shutdown

**Low Resistance** - Energy efficient

**Suitable for HVAC or Turbine Intake Applications**

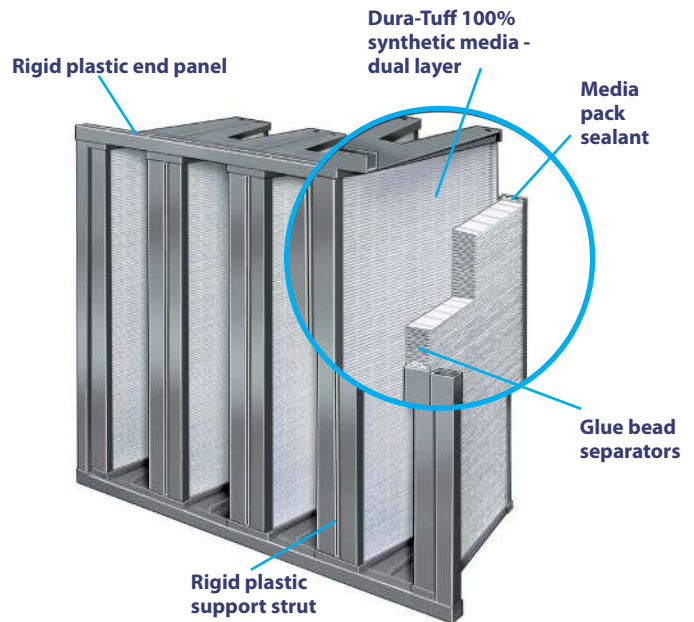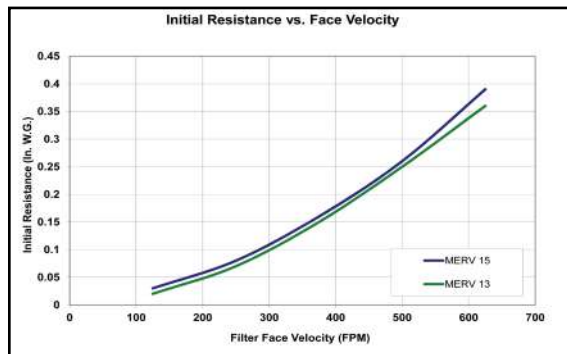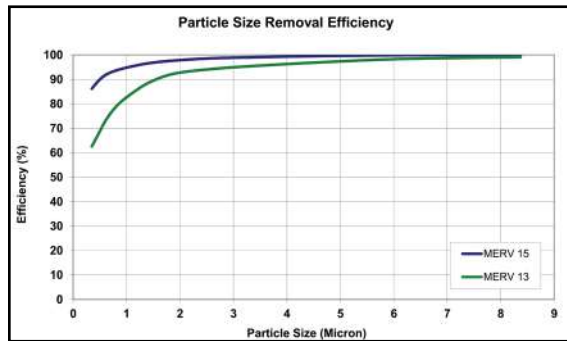

| Model Designation | MERV Performance | Nominal Size (HxWxD) | Actual Size (HxWxD)      | Rated Air Flow @500 FPM (CFM) | Rated Initial Resistance (In.W.G) | Recommended Final Resistance (In.W.G) |
|-------------------|------------------|----------------------|--------------------------|-------------------------------|-----------------------------------|---------------------------------------|
| VPP-S-9504        | 15               | 24 X 24 X 12         | 23-3/8 X 23-3/8 X 11-1/2 | 2000                          | .26"                              | 1.5"                                  |
| VPP-S-9515        | 15               | 24 X 20 X 12         | 23-3/8 X 19-3/8 X 11-1/2 | 1650                          | .26"                              | 1.5"                                  |
| VPP-S-9503        | 15               | 24 X 12 X 12         | 23-3/8 X 11-3/8 X 11-1/2 | 1000                          | .26"                              | 1.5"                                  |
| VPP-S-6504        | 13               | 24 X 24 X 12         | 23-3/8 X 23-3/8 X 11-1/2 | 2000                          | .25"                              | 1.5"                                  |
| VPP-S-6515        | 13               | 24 X 20 X 12         | 23-3/8 X 19-3/8 X 11-1/2 | 1650                          | .25"                              | 1.5"                                  |
| VPP-S-6503        | 13               | 24 X 12 X 12         | 23-3/8 X 11-3/8 X 11-1/2 | 1000                          | .25"                              | 1.5"                                  |

- Performance data is per ASHRAE 52.2-2012 Test Method, based on a 24x24x12 filter size run at a test velocity of 492 FPM.
- Width and height dimensions are interchangeable. Vari+Plus VP filters can be installed with the pleats either vertical or horizontal.

3. Continuous operating temperature: 170°F (76°C).

**Underwriters Laboratories, Inc. Classification:**  
Vari+Plus VP filters are classified UL Standard 900 for flammability.

A-VPVP-1116



[www.clclair.com/airguard](http://www.clclair.com/airguard)



Distributed by:

© 2016 CLARCOR Air Filtration Products  
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed at [www.clclair.com](http://www.clclair.com).



**CLARCOR Air Filtration Products**  
100 River Ridge Circle • Jeffersonville, IN 47130  
Customer Service: 1-866-247-4827 • Fax: 1-866-601-1809  
Email: [mailbag@clarcor.com](mailto:mailbag@clarcor.com) • [www.clclair.com/airguard](http://www.clclair.com/airguard)