



Producto distribuido por

**SDM**  
Oil & Gas

 (+51) 999 012777  [ventas@sdm.pe](mailto:ventas@sdm.pe)

[www.sdm.pe](http://www.sdm.pe) | Av. Galvez Barrenechea 274. San Isidro

## CRYOGENIC RECIPROCATING PUMPS

**VT-100 SERIES**

FOR LIQUEFIED NATURAL GAS (LNG)

**TECHNICAL FEATURES**

- Compatible with Cold Converter and Thermosyphon storage tanks
- Modular assembly (from Simplex to Triplex)
- High efficiency
- Low operating noise
- Quick maintenance thanks to the integrated cartridge seal system

**APPLICATIONS**

- Peak shaving applications
- Pipeline back-up
- Power generation

**CRANKDRIVE SYSTEM**

- TW 10 – Oil lubrication

**TRANSFERRED FLUIDS**

- LNG

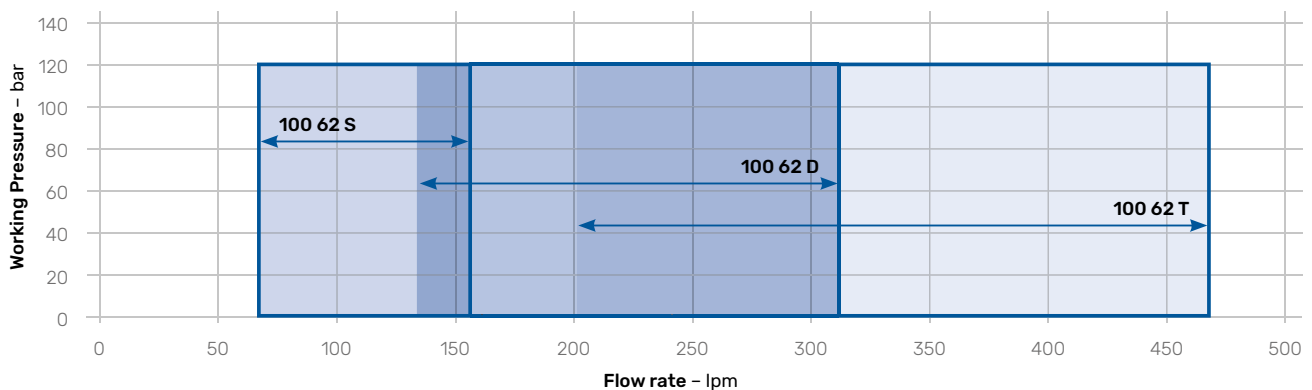
**VT-100 TW 10 PERFORMANCES**

Model	Piston		Flow rate				Maximum allowable suction pressure (MASP)		Maximum allowable working pressure (MAWP)		Power installed
	Bore	Stroke	Min 150 rpm*		Max 350 rpm		bar	psi	bar	psi	Referred to MAWP kW
Series pump	mm	mm	lpm	gpm	lpm	gpm	bar	psi	bar	psi	kW
<b>VT-100 62 S</b>	100	62	67	17,7	156	41,2	20	290	120	1740	37 – 75
<b>VT-100 62 D</b>	100	62	134	35,4	312	82,4	20	290	120	1740	45 – 110
<b>VT-100 62 T</b>	100	62	201	53,1	468	123,6	20	290	120	1740	55 – 132

\*Flow rate can be reduced by forced oil lubrication system

NPSH required: 1 – 1,2 m

Data can be subjected to change



**STANDARD SUPPLY**

- Painted steel frame
- Cryogenic pump
- Electric motor
- Transmission by belt and pulley, available also with gearbox
- Double pulsation damper

**STANDARD ACCESSORIES**

- Suction flexible hose
- Return flexible hose
- Low pressure safety valve
- High pressure safety valve
- High pressure pneumatic valve for venting
- Check valve
- Pressure gauge
- Pressure switch
- Temperature sensor for cool down
- Temperature sensor for cavitation
- Temperature sensor for leaks detection

**OPTIONAL ACCESSORIES**

- Flushing system with nitrogen gas
- Electrical control panel
- 2 speed electric motor
- Motor suitable for VFD
- Complete automatic system available on demand

Average SKID weight: 1600 kg

Package overall dimensions: 302 x 119 x 115 cm

**TEST AND CHECKS**

- Dimensional control of each mechanical component before assembly
- Performance test with LIN available for class and customer

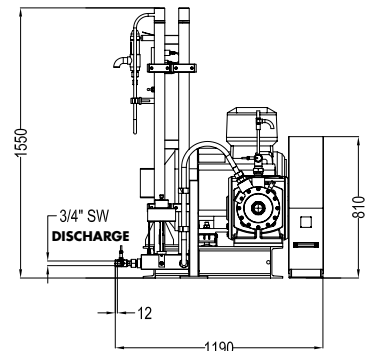
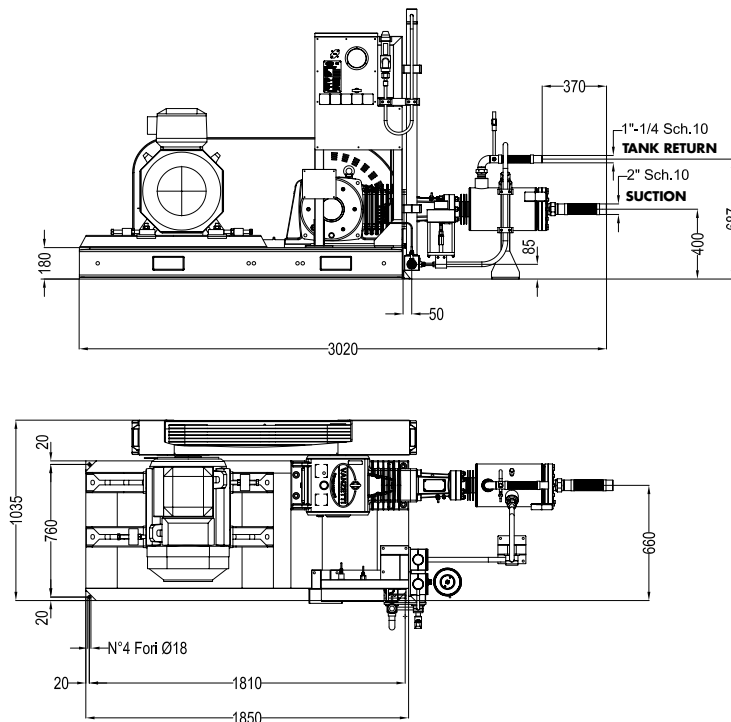
**STANDARDS**

Designed according to:

- European Directive Machinery
- European Directive PED
- European Directive ATEX
- EIGA/IGC/CGA guidelines



II 2G Ex h IIB/IIC T4 Gb

**GENERAL DIMENSIONS****COLD END DETAIL**

The innovative seal cartridge allows a very easy maintenance



Certified quality management system